



NT33-2AF2-D5

SPEC SHEET

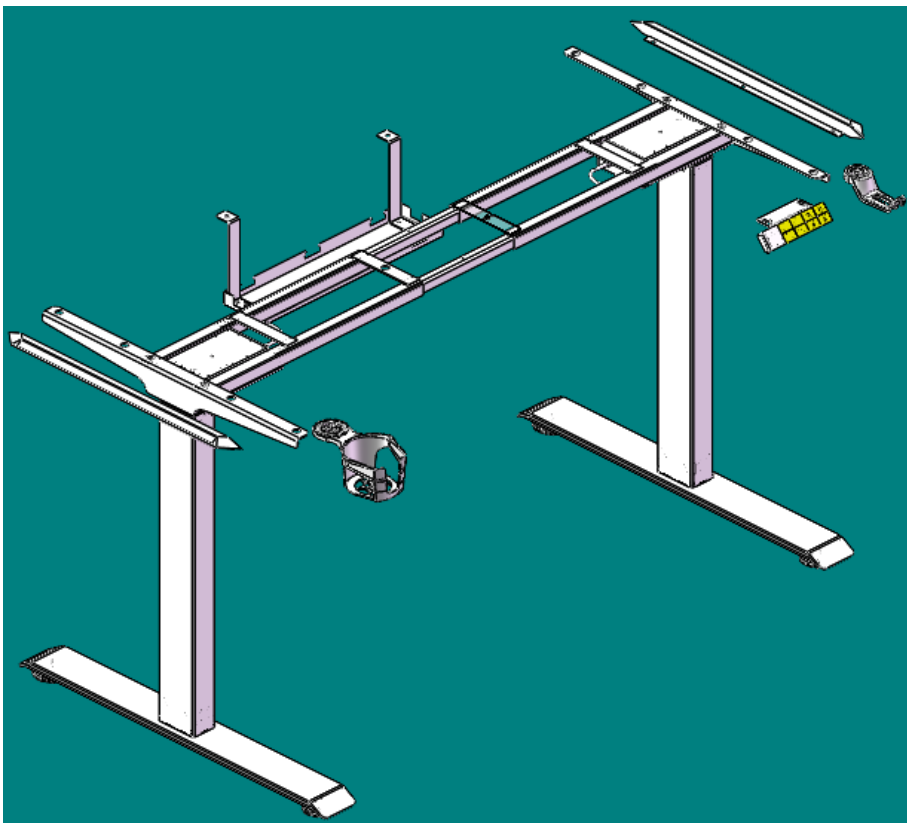

SPEC SHEET

NT33-2AF2-D5

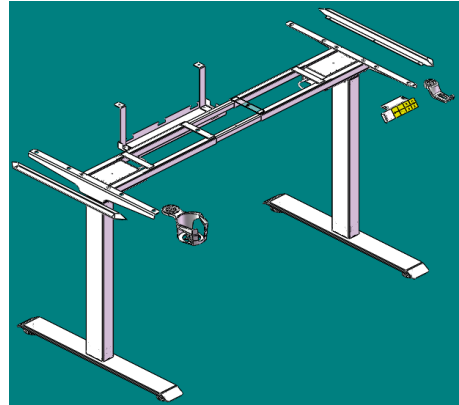

SPECS

- Motor Type:** Dual brushed motors
- Column Type:** 2-leg, 2-stage, standard rectangular / hole-free
- Column Size:** 75 × 45 / 80 × 50 mm
- Height Range:** 690–1190 mm (±5 mm)
- Stroke:** 500 mm
- Frame Width Range:** 996–1700 mm (±5 mm)
- Compatible Desktop Length:** 1000–1800 mm
- Side Bracket Length:** 575 mm
- Foot Size:** 600 × 75 mm
- Max. Load:** 100 kg / 220.5 lb
- Max. Speed:** 30 mm/s
- Noise Level:** ≤50 dB (unloaded)
- Protection:** Anti-collision rebound; sedentary reminder
- Standby Power:** <0.1 W
- Finish:** Powder-coated; white, black or gray (standard)
- Package:** Frame 1080 × 270 × 225 mm
- Desktop:** 1460 × 760 × 65 mm
- N.W./G.W.:** Frame 25/27 kg; desktop 11.5/13.5 kg


OPTIONS

- Custom colors available
- Handsets: standard / integrated-control
- Power systems: control box / adapter / wall plug
- Multiple foot designs available

USE


- Duty Cycle: 10% (2 min on / 18 min off)
- Environment: Indoor use
- Storage & Transport: –10°C to 70°C

DIMENSIONS

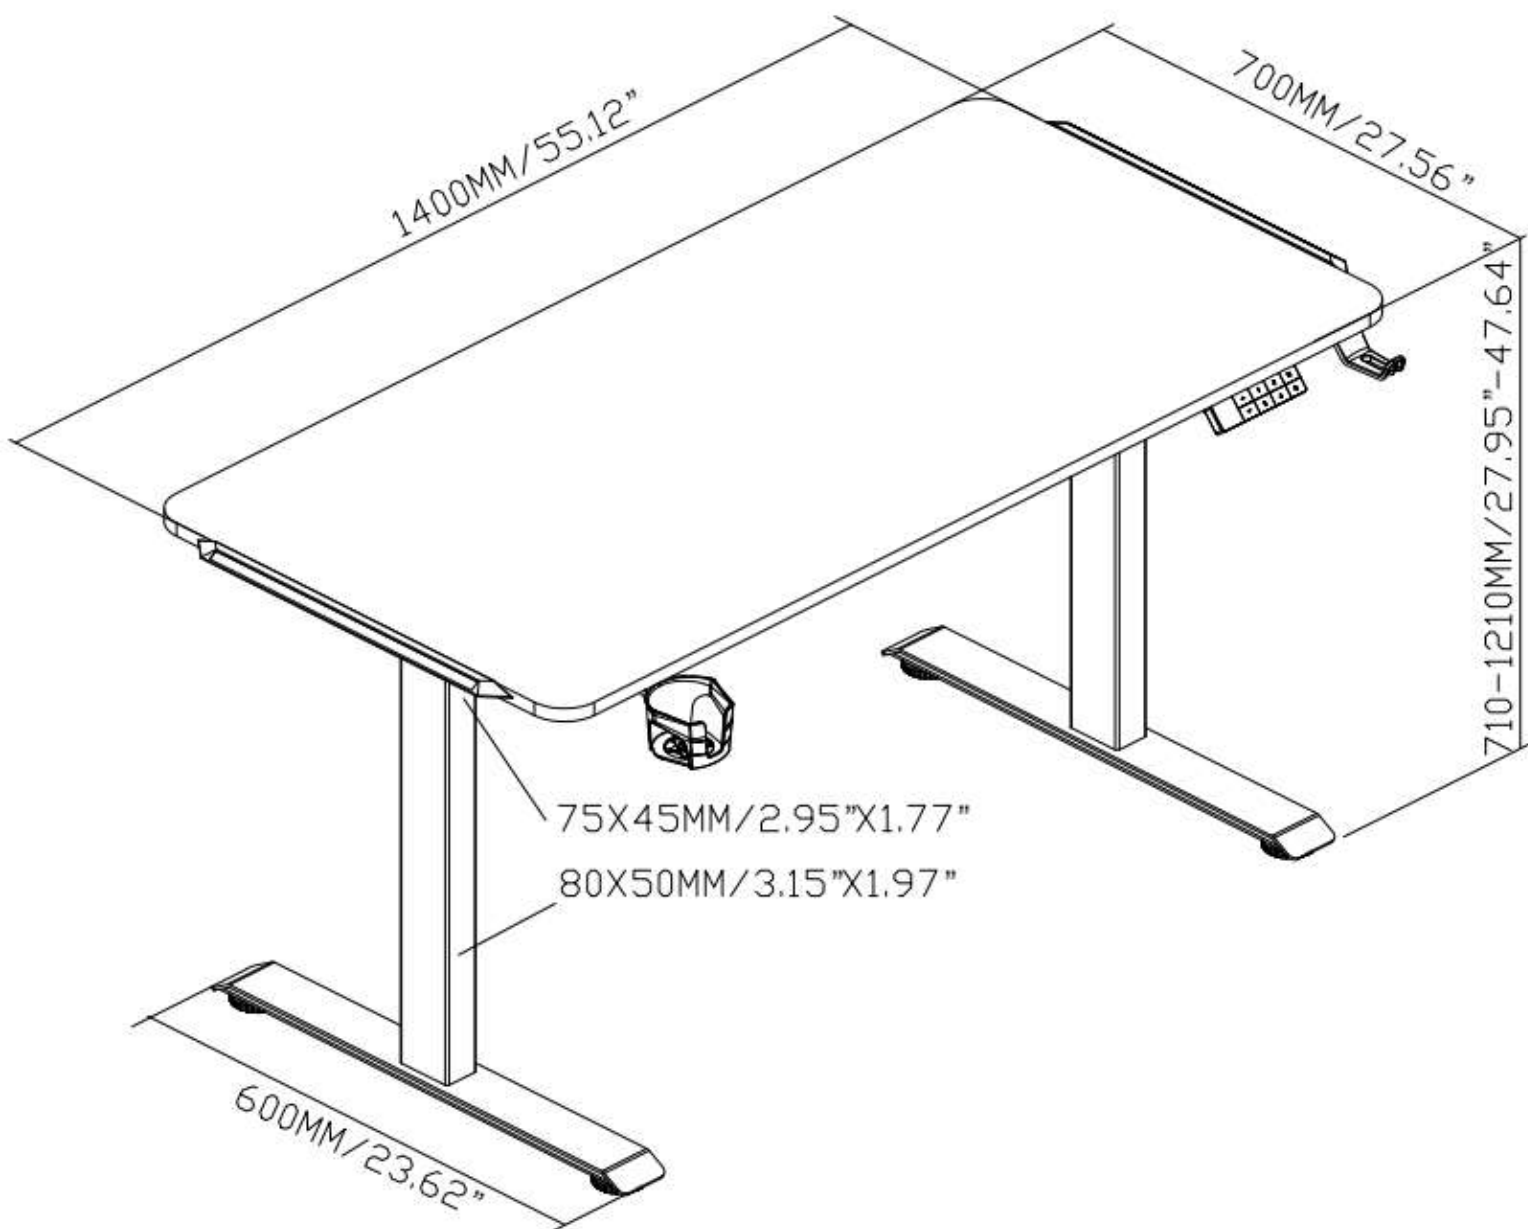

MODEL CODE

NT33 X-X-X-X-X-X-X-X

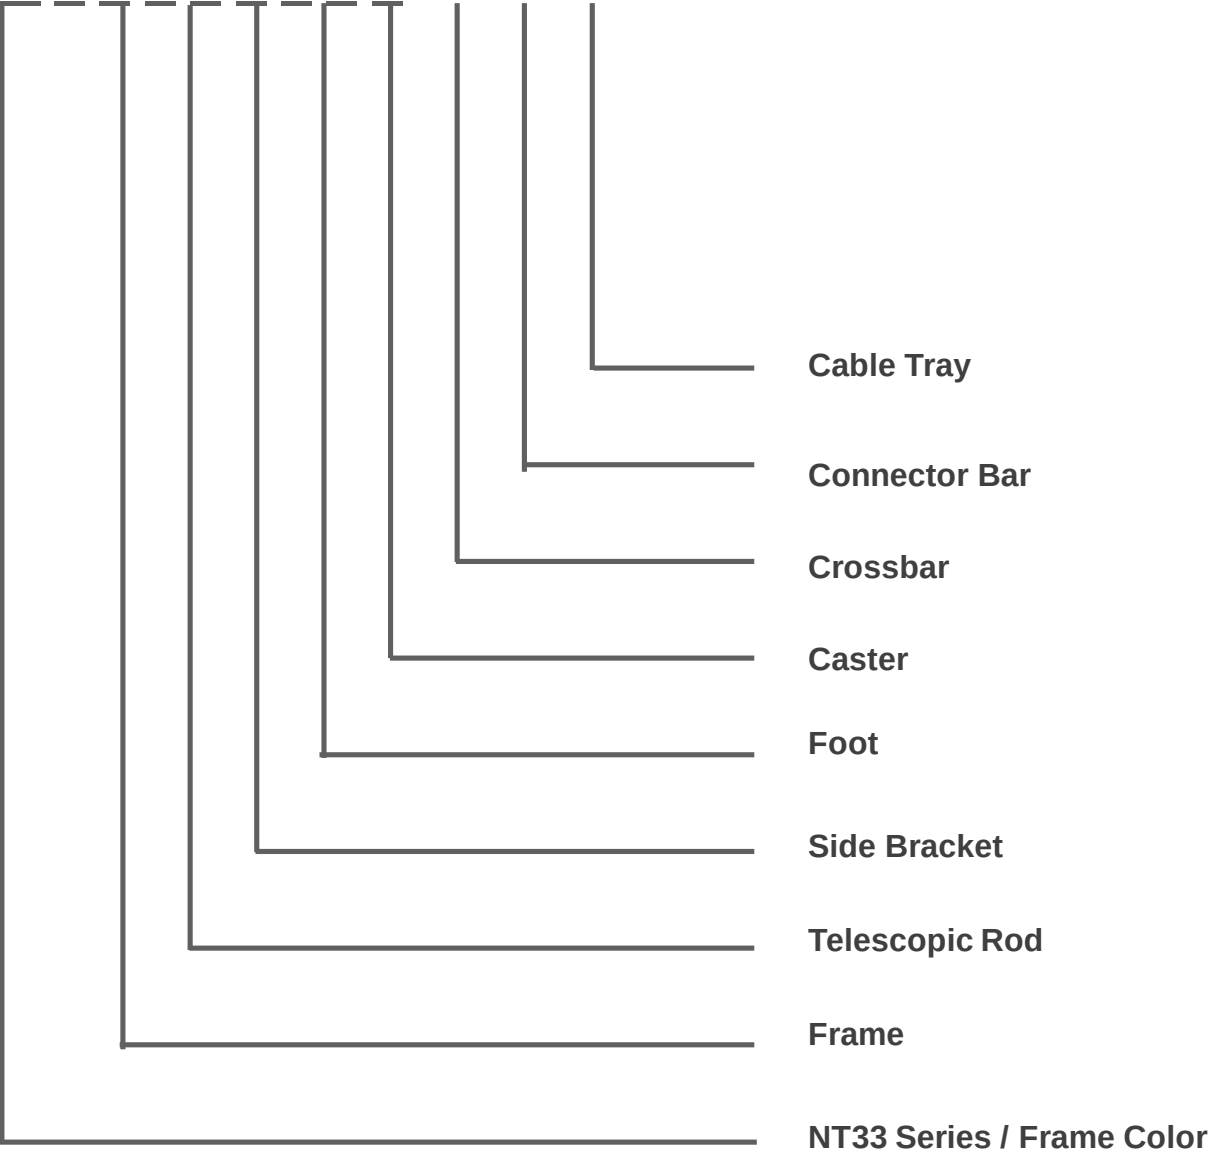

F: Hole-free / A: Standard / R: Reversed / G: Ball bearing