Shaoxing Naite Drive Technology Co.,Ltd
NO.68,Sanjiang Street,Shengzhou City,Zhejiang Province,China


www.natekj.com
sales@natekj.com
+86-575-83007022
+86 18888790086

Official website
ZHEJIANG MADE
Alibaba

NATE

SMART DESK
SMART LIFE

HEIGHT ADJUSTABLE SMART FURNITURE SOLUTIONS

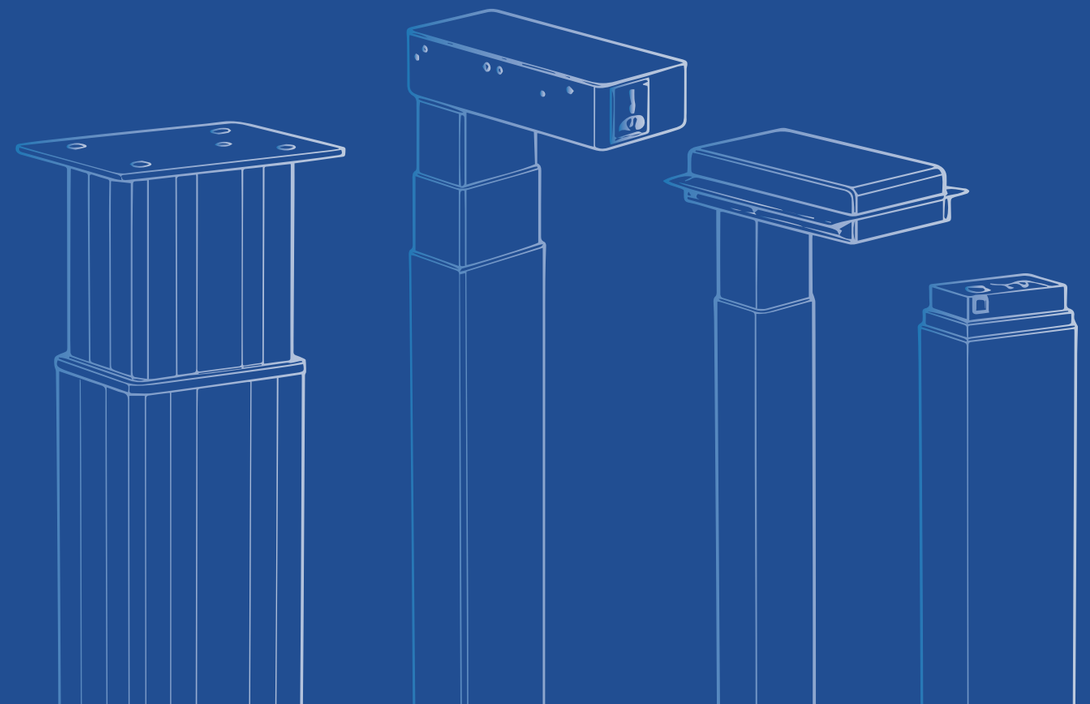

2026

Shaoxing Naite Drive Technology CO.,Ltd

CONTENTS

CONTENTS

1 ABOUT US

About NATE P01
Sustainable Development P03
Key Capabilities P05
Global Footprint P07
Qualifications & Certifications P09

2 PRODUCT CLASSIFICATION

Component Based Customized Solutions P11
Innovative Intelligence Series P13
Classic Series P25
Economical Series P45
Complete Desk Series P57

3 MODULE

Lift Columns P69
Control Box P75
Handsets P77
Feet P81
Accessories P83
Table Top P87

ABOUT NATE



Shaoxing Naite Drive Technology Co., Ltd., founded in July 2013, is an innovative enterprise specializing in the production of ergonomic height-adjustable desk;we transmit the aesthetics of life and advocate healthy office methods, and always take "providing more people with a healthy office environment " as the enterprise mission.

SCAN TO
WATCH THE VIDEO



2025
START CONSTRUCTION

2026
CONSTRUCTION COMPLETION

2027
PUT INTO PRODUCTION


In 2027, our 55,000㎡ intelligent manufacturing base will become operational, doubling our design capacity and reserving sufficient space for the company's future high-quality development. Centered around the smart factory, we will comprehensively establish a new intelligent manufacturing ecosystem, propelling the enterprise into a new stage of high-quality development.





SUSTAINABLE DEVELOPMENT

NATE uses intelligent production (digital injection molding, robot welding) for precision, efficiency and stability, while monitoring energy use to cut resource waste and carbon emissions.

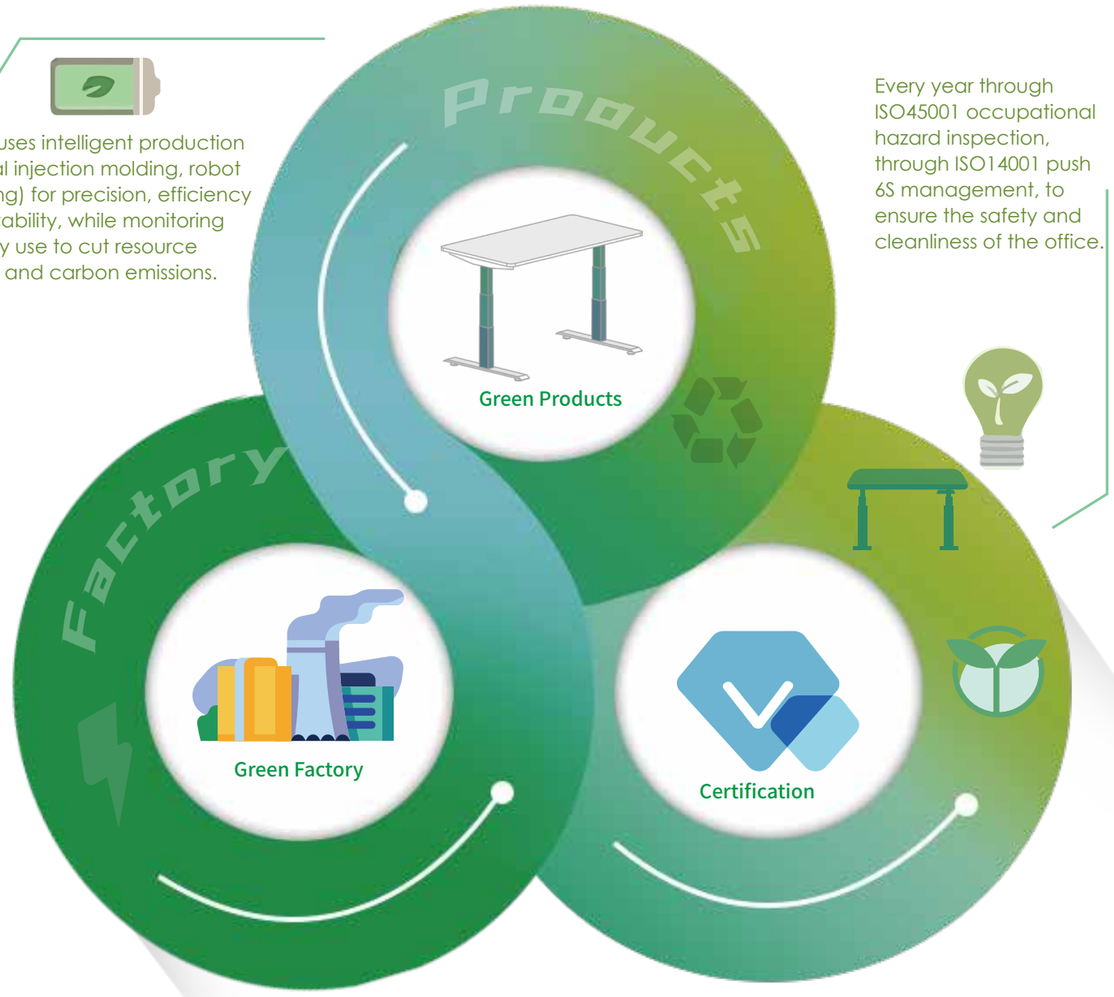

Every year through ISO45001 occupational hazard inspection, through ISO14001 push 6S management, to ensure the safety and cleanliness of the office.

GREEN FACTORY

The annual clean production audit report is obtained, and the energy low carbon permanent magnet air compressor is adopted, which can save up to 33,000 KWH of electric energy each year.



Durability

20000+

Column lifting service life test




Standby Power

0.1W

Ultra-Low standby power consumption

10,000 tables for 10 years


→ Saved **3.6** tons CO_2e



Brushless Motor

20%

We adopts brushless motor, the efficiency is improved by 20%, environmental protection and energy saving, and the life is longer.



Q-Install

Reduce recycling, transportation and installation costs; portable and efficient.



Recyclable Raw Materials



- Honeycomb paperboard



- Eggshell cardboard

- ABS
- PC
- POM
- Other Plastic

ISO 45001
ISO 14001
ISO 50001
ISO 9001
ISO 14064
Standardize processes, enhance efficiency, and ensure quality

Strictly control the use of hazardous substances

Control and management of chemical substances

Reduce E-waste and improve resource recycling

KEY CAPABILITIES



Professional R&D Capability

End-to-end support from concept to finished product, ensuring seamless execution of your projects from ideation to realization.



Core Customization Capability

Integrates leading innovation, strict quality control, and highly competitive pricing.



Flexible Manufacturing Capability

Rapid-response vertical integration, delivering efficient and agile production to precisely meet diverse market demands.



Worry-Free After-Sales Support

Backed by a 5-year warranty commitment, our dedicated after-sales team ensures rapid response and comprehensive lifecycle support.



Stringent Quality Control Capability

Equipped with 30+ inspection equipment, providing full-chain quality assurance to ensure every product meets international standards.



Comprehensive Marketing Support

We offer one-stop marketing material production services, including product photography, professional retouching, and installation videos.

GLOBAL FOOTPRINT



ASIA

EUROPE

NORTH AMERICA

SOUTH AMERICA

OCEANIA

35000+ m²
Factory Area

200+
Factory Employee


450K+ PCS/YR
Production Capacity

30+
R&d Engineer

100+
Patents


80+
Partner Countries

QUALIFICATIONS & CERTIFICATIONS

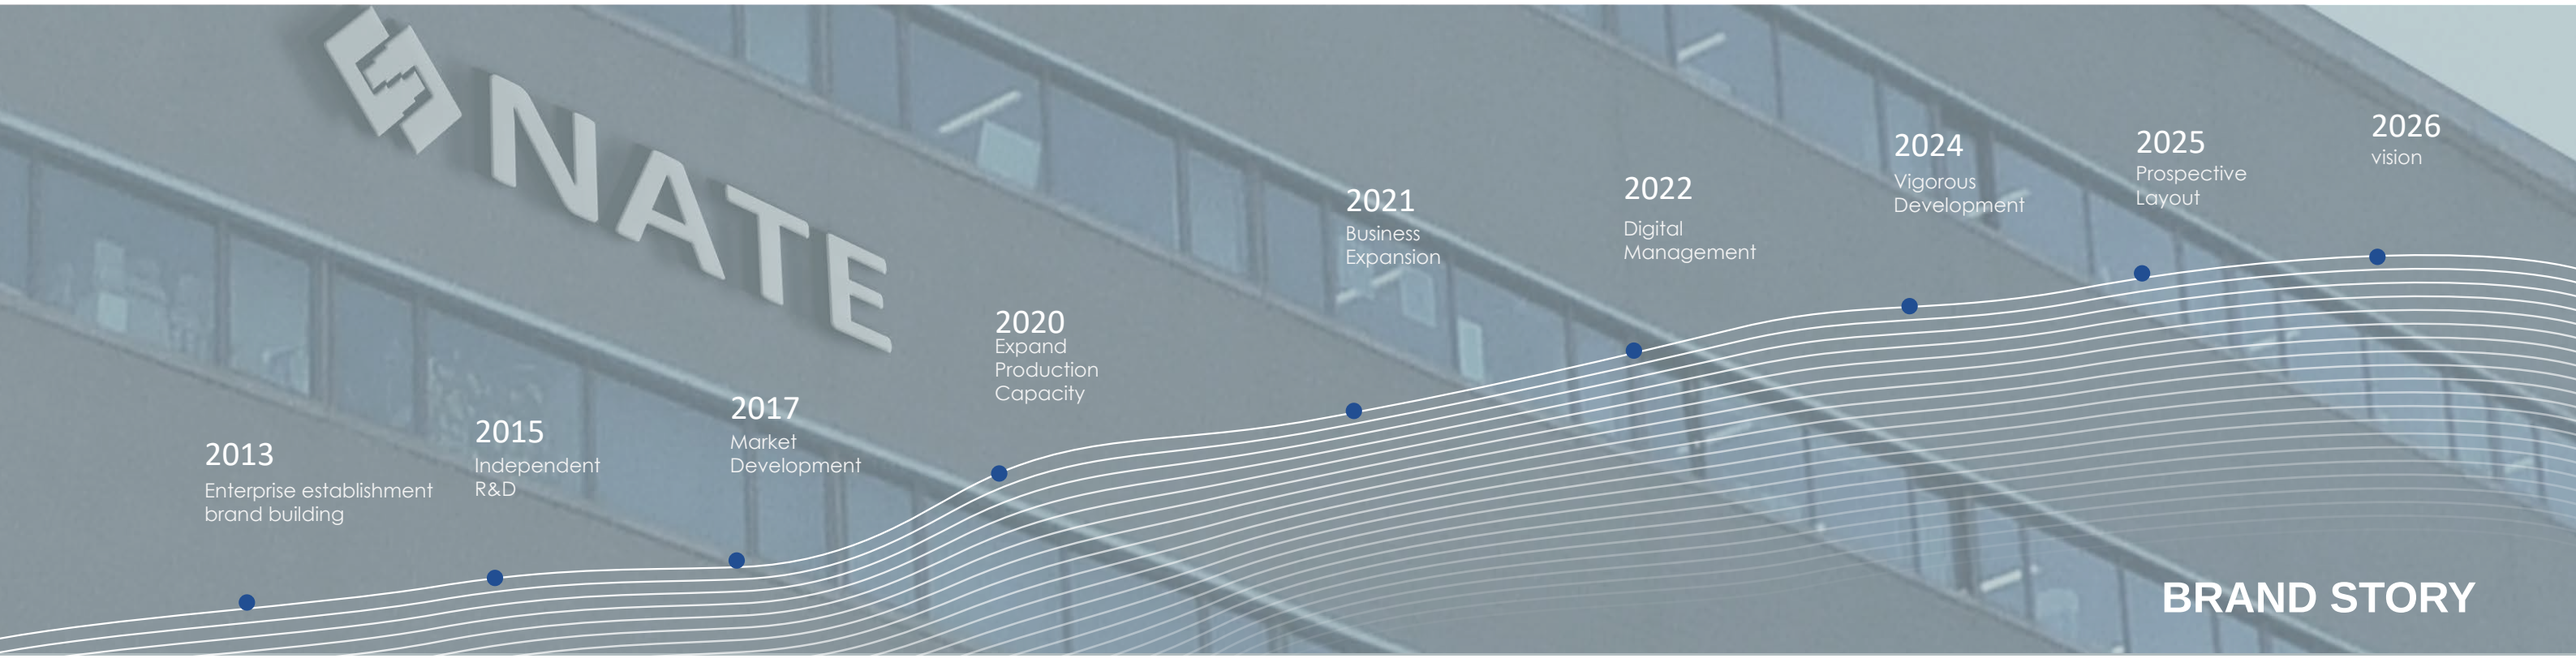


AMER cUL Ca Prop65 UL FC BIFMA AU SAA APPROVALS
EU CE EMC UKCA GS geprufte Sicherheit ASIA CB PSE KC

COMPONENT BASED CUSTOMIZED SOLUTIONS

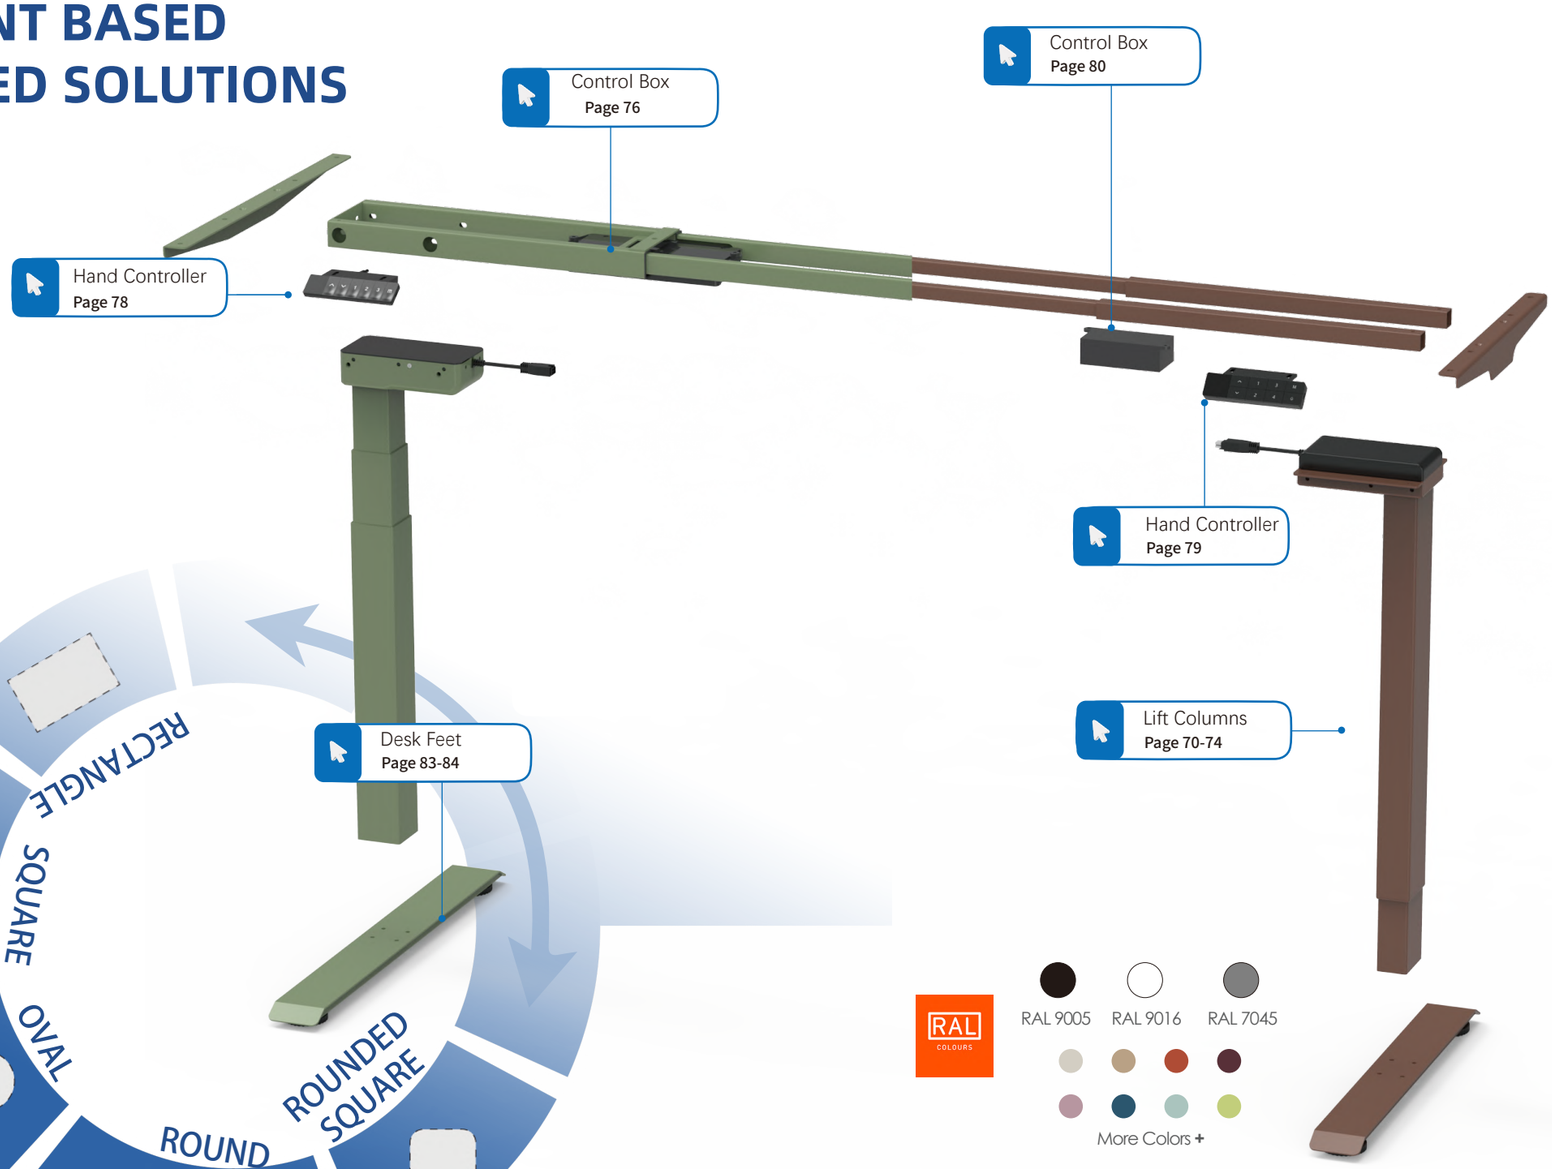


In addition to the classic black, white, and gray, you can customize desk frames, legs, and feet in almost any specific color.

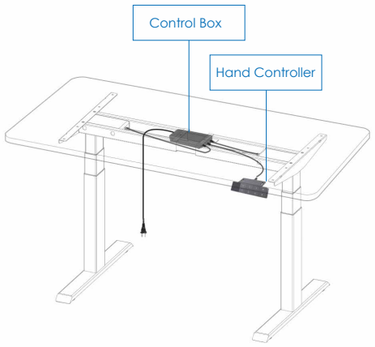

Classic Model

Split Design Of Hand Controller + Independent Controller

Load Capacity: **120kg** Speed: **40mm/s**

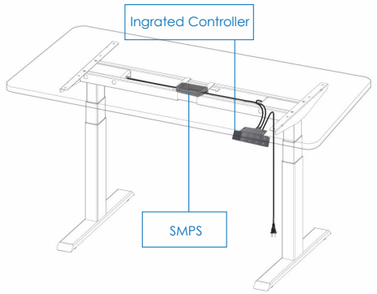

Economical Model


Integrated Hand Controller Design With Compact Structure

Load Capacity: **100kg** Speed: **30mm/s**

INNOVATIVE INTELLIGENCE

SLIM NO BOX DESIGN

This lifting column feature a sleek and compact design, opening up new possibilities for height-adjustable desk solutions. The motor is vertically installed inside the column, eliminating the need for a 90° motor box and streamlining the overall profile—thus enabling endless design flexibility.

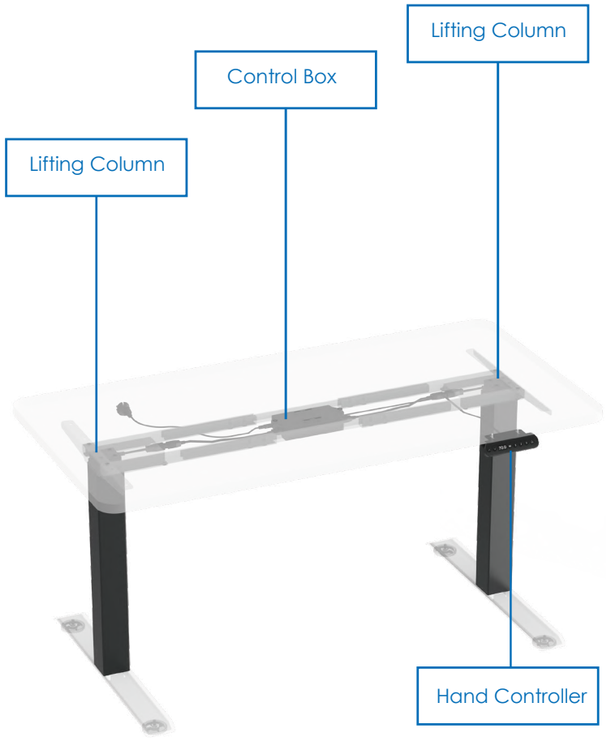




NT33-RK-2BHF3

Height Range	**Speed**	**Stroke**
656-1286mm	40mm/s	630mm
Width Range	**Load Capacity**	**Voltage**
960-1500mm	120kg	100V-240V



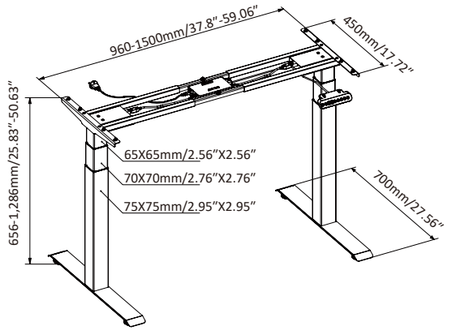

INNOVATIVE INTELLIGENCE


HIDDEN WIRING DESIGN

This lifting column features a built-in power cable and retains the height adjustment function. Simply connect the power supply at the bottom of the column to power the entire height-adjustable desk.








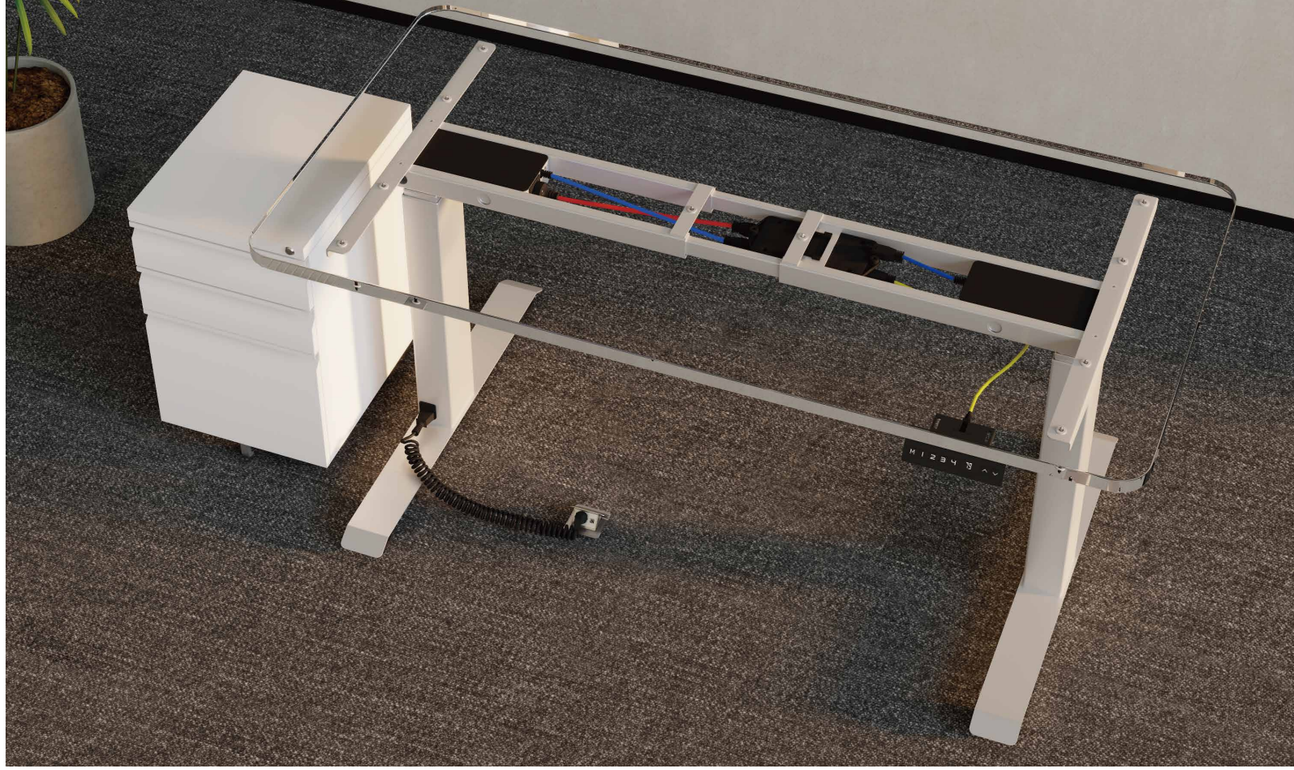

NT33-TD-2IF3

Height Range	Speed	Stroke
600-1250mm	40mm/s	650mm
Width Range	**Load Capacity**	**Voltage**
1010-1750mm	120kg	100V-240V



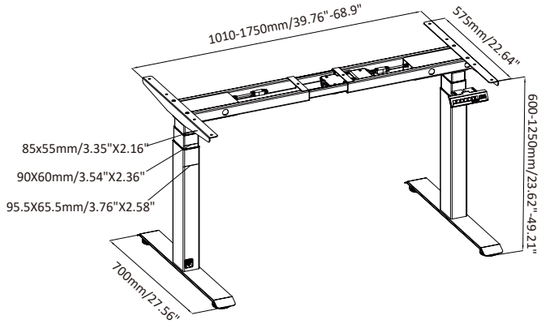

INNOVATIVE INTELLIGENCE

HIGH STRENGTH LOAD BEARING

NT33-4NBF2

Height Range
700-1200mm


Speed
18mm/s

Stroke
500mm

Width Range
1250mm

Load Capacity
300kg



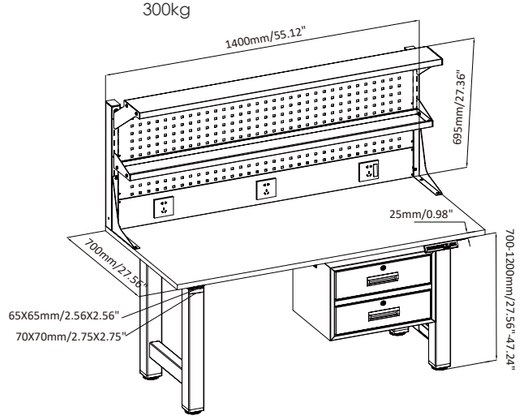

NT33-2NF2

Height Range
740-1195mm


Speed
8mm/s

Stroke
455mm

Width Range
1015-1750mm

Load Capacity
300kg



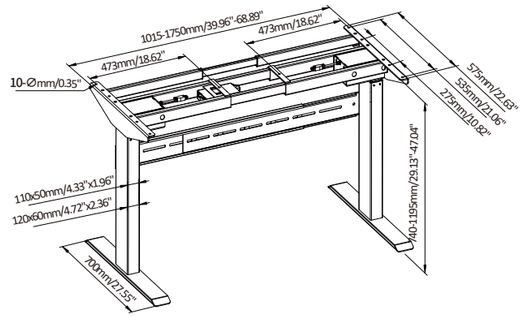



INNOVATIVE INTELLIGENCE


DUAL BRUSHLESS MOTORS

Adopting a brushless motor design, it features long service life and high reliability, delivers high efficiency and low energy consumption, and ensures smooth and stable operation.





- Higher output power




- Higher load capacity perfect for heavy equipment and multi-monitor setups

NT33-2HF3A

Height Range	**Speed**	**Stroke**
600-1250mm	40mm/s	600mm
Width Range	**Load Capacity**	**Voltage**
1010-1750mm	180kg	100V-240V



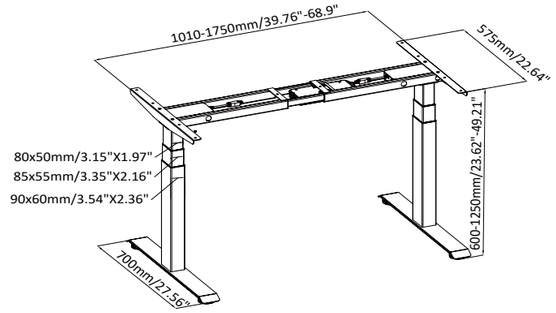

INNOVATIVE INTELLIGENCE


SINGLE BRUSHLESS MOTOR

Adopting a brushless motor design, it features long service life and high reliability, delivers high efficiency and low energy consumption, and ensures smooth and stable operation.





• Higher output power




• Higher load capacity



NT33-2SACRHF2(C)

Height Range	Speed	Stroke
700-1140mm	30mm/s	440mm
Width Range	**Load Capacity**	**Voltage**
1010-1600mm	100kg	100V-240V




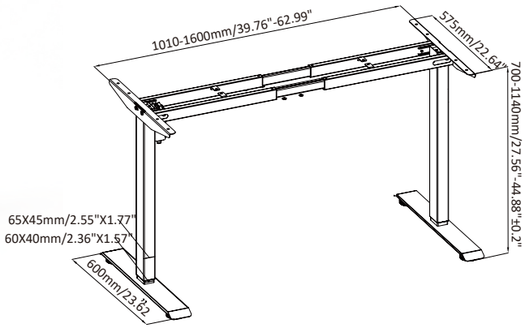

NT33-2SBAF2

Height Range	Speed	Stroke
715-1155mm	20mm/s	440mm
Width Range	**Load Capacity**	**Voltage**
1000-1600mm	70kg	100V-240V



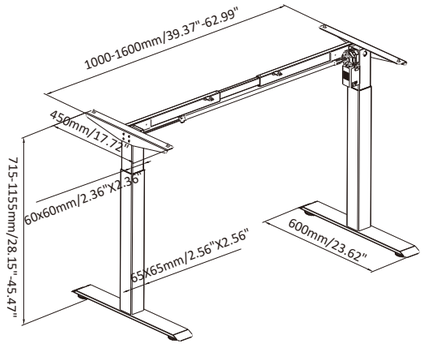

INNOVATIVE INTELLIGENCE

QUICK ASSEMBLY DESIGN

Without heavy installation process, NATE provides an efficient and stable lifting product, which saves 70% installation time on the basis of the original frame system, and greatly reduces the cost of manual installation of desk.

Q-ASSEMBLY 1 No Screws Needed, Three-step quick installation



Q-ASSEMBLY 2 Pre-tightened screws, 50% faster






NT33-2AF3-KZE1

Height Range	Speed	Stroke
600-1250mm	40mm/s	650mm
Width Range	**Load Capacity**	**Voltage**
1010-1750mm	120kg	100V-240V



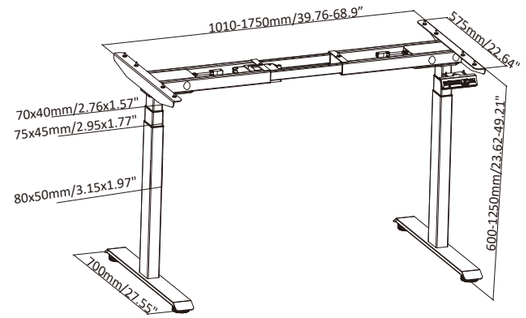

1-leg
Single Motor/2-stage

Anti-collision ☑

Frame Color

Height Range(E1)
575-1225mm

Height Range(E2)
675-1325mm

Height Range(E3)
600-1250mm


Speed
40mm/s

Load Capacity
80kg

Voltage
100V-240V


NT33-E1






NT33-E2





NT33-E3






2-legs
Dual Motors/2-stage

Anti-collision ☑

Frame Color



Shape								
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60	75x75	95.5x65.5
Standard Column	NT33-2AF2	NT33-2BF2	NT33-2CF2	NT33-2DF2	NT33-2FF2	NT33-2HF2	NT33-2BHF2	NT33-2IF2
Reversed Column	NT33-2ARF2	NT33-2BRF2	NT33-2CRF2	NT33-2DRF2	NT33-2FRF2	NT33-2HRF2	/	/
Height Range(mm)	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	30	30	30	30	30	30	30	30
Load Capacity(kg)	120	120	120	120	120	120	120	120
Electric Control	Advanced control system							

NT33-2CF2

Height Range
700-1200mm

Speed
30mm/s


Stroke
500mm

Width Range
1010-1750mm

Load Capacity
120kg

Voltage
100V-240V



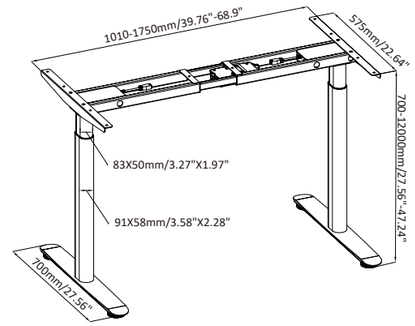




2-legs

Dual Motors/2-stage

Anti-collision ☑



Shape								
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60	75x75	95.5x65.5
Standard Column	**NT33-2AF3**	**NT33-2BF3**	**NT33-2CF3**	**NT33-2DF3**	**NT33-2FF3**	**NT33-2HF3A**	**NT33-2BHF3**	**NT33-2IF3**
Reversed Column	**NT33-2ARF3**	**NT33-2BRF3**	**NT33-2CRF3**	**NT33-2DRF3**	**NT33-2FRF3**	**NT33-2HRF3A**	/	/
Height Range(mm)	600-1250	600-1250	640-1290	640-1290	600-1250	600-1250	600-1250	600-1250
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	40	40/80	40	40	40/80	40/80	40	40
Load Capacity(kg)	120	120	120	120	120	120	120	120
Electric Control	**Advanced control system**							

NT33-2IF3

Height Range
600-1250mm

Speed
40mm/s


Stroke
650mm

Width Range
1010-1750mm

Load Capacity
120kg

Voltage
100V-240V



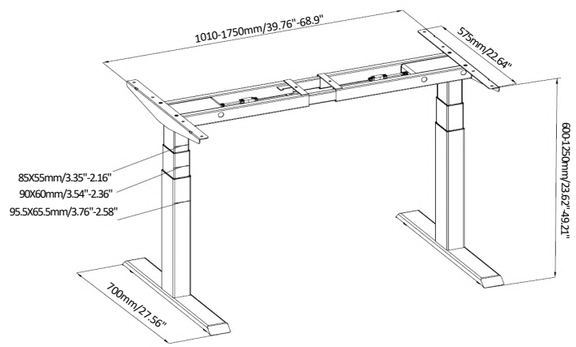


3-legs

Three Motors/2-stage

Anti-collision ☑

Frame Color



Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-3AF2	NT33-3BF2	NT33-3CF2	NT33-3DF2	NT33-3FF2	NT33-3HF2
Reversed Column	NT33-3ARF2	NT33-3BRF2	NT33-3CRF2	NT33-3DRF2	NT33-3FRF2	NT33-3HRF2
Height Range(mm)	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	30	30	30	30	30	30
Load Capacity(kg)	150	150	150	150	150	150
Electric Control	Advanced control system					

NT33-3AF2

Height Range
700-1200mm

Speed
30mm/s


Stroke
500mm

Width Range
1010-1750mm

Load Capacity
150kg

Voltage
100V-240V



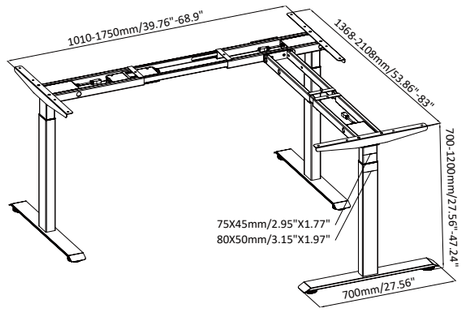


3-legs

Three Motors/3-stage

Anti-collision ☑

Frame Color



Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-3AF3-90-120-180	NT33-3BF3-90-120-180	NT33-3CF3-90-120-180	NT33-3DF3--90-120-180	NT33-3FF3-90-120-180	NT33-3HF3A-90-120-180
Reversed Column	NT33-3ARF3-90-120-180	NT33-3BRF3-90-120-180	NT33-3CRF3-90-120-180	NT33-3DRF3-90-120-180	NT33-3FRF3-90-120-180	NT33-3HRF3A-90-120-180
Height Range(mm)	600-1250	600-1250	640-1290	640-1290	600-1250	600-1250
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	40	40	40	40	40	40
Load Capacity(kg)	150	150	150	150	150	150
Electric Control	Advanced control system					

NT33-3AF3-90-120-180

Height Range
600-1250mm

Speed
40mm/s

Stroke
650mm




Rotatable frame

Width Range
1010-1750mm

Load Capacity
150kg

Voltage
100V-240V



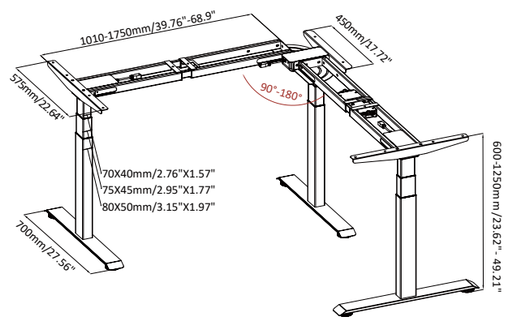


Add-on welding block



Connects standing desk frame columns; paired with side connectors, quickly converts single-person desk frames to face-to-face ones or other configurations, enhancing universality.

4-legs

four Motors/2-stage



Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-4AF2	NT33-4BF2	NT33-4CF2	NT33-4DF2	NT33-4FF2	NT33-4HF2
Reversed Column	NT33-4ARF2	NT33-4BRF2	NT33-4CRF2	NT33-4DRF2	NT33-4FRF2	NT33-4HRF2
Height Range(mm)	700-1200	700-1200	700-1200	700-1200	700-1200	700-1200
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	30	30	30	30	30	30
Load Capacity(kg)	200	200	200	200	200	200
Electric Control	Advanced control system					

NT33-4DF2

Height Range
700-1200mm

Speed
30mm/s


Stroke
500mm

Width Range
1010-1750mm

Load Capacity
120kg/position


Voltage
100V-240V



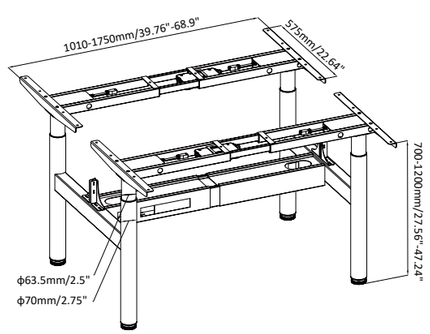

4-legs

four Motors/3-stage



Shape						
Size(mm)	80x50	70x70	91x58	φ70	85x55	90x60
Standard Column	NT33-4AF3	NT33-4BF3	NT33-4CF3	NT33-4DF3	NT33-4FF3	NT33-4HF3A
Reversed Column	NT33-4ARF3	NT33-4BRF3	NT33-4CRF3	NT33-4DRF3	NT33-4FRF3	NT33-4HRF3A
Height Range(mm)	600-1250	600-1250	640-1290	640-1290	600-1250	600-1250
Width Range(mm)	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750	1010-1750
Speed(mm/s)	40	40	40	40	40	40
Load Capacity(kg)	200	200	200	200	200	200
Electric Control	Advanced control system					

NT33-4HF3A



Add-on welding block

Height Range
600-1250mm

Speed
40mm/s


Stroke
650mm

Width Range
1030-1750mm

Load Capacity
120kg/position

Voltage
100V-240V



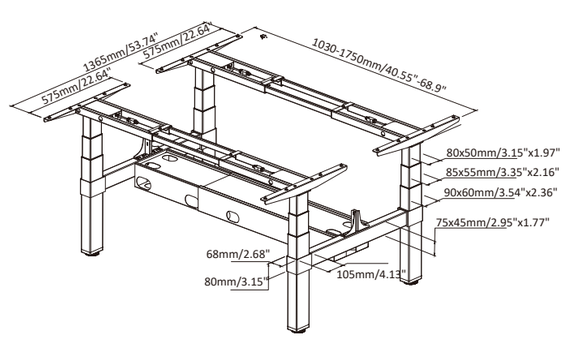


Workstation

Modular Design

Anti-collision ☑

Frame Color



NT33-2HF3A



2-leg

Height Range
600-1250mm

Width Range
1010-1750mm


Speed
40mm/s

Load Capacity
120kg

Stroke
650mm

Voltage
100V-240V



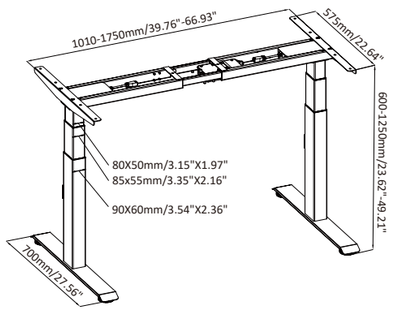

NT33-3HF3A-90



Add one leg transformed from 2-leg to 3-leg

Height Range
600-1250mm

Width Range
1010-1750mm


Speed
40mm/s

Load Capacity
150kg

Stroke
650mm

Voltage
100V-240V



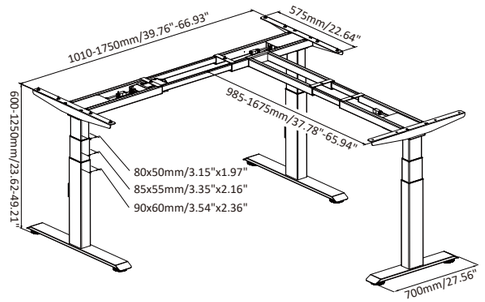


Workstation

Modular Design

Anti-collision ☑

Frame Color



NT33-2HF3A



2-leg with groove

Height Range
600-1250mm

Width Range
1450-1750mm


Speed
40mm/s

Load Capacity
120kg

Stroke
650mm

Voltage
100V-240V



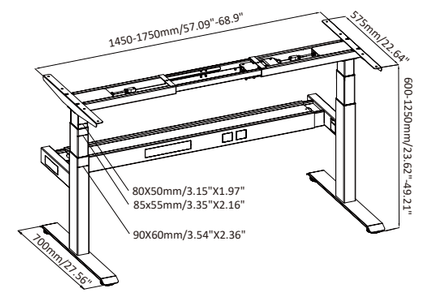

NT33-4HF3A



Add two legs transformed from 2-leg with groove to 4-leg

Height Range
600-1250mm

Width Range
1450-1750mm


Speed
40mm/s

Load Capacity
120kg/position

Stroke
650mm

Voltage
100V-240V




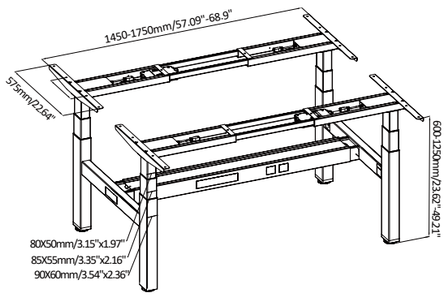

Workstation

Multi-station

Anti-collision ☑
Frame Color



NT33-OB-6DF3

Height Range
630-1280mm


Speed
35mm/s


Stroke
650mm

Width Range
1160-1750mm

Load Capacity
200kg

Voltage
100V-240V

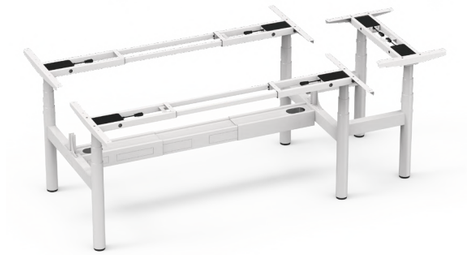

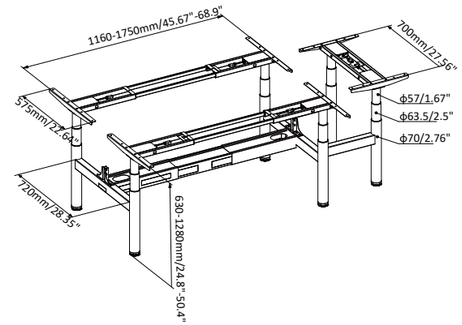

NT33-OB-6BF3

Height Range
600-1250mm


Speed
40mm/s


Stroke
650mm

Width Range
2140-3620mm

Load Capacity
300kg

Voltage
100V-240V

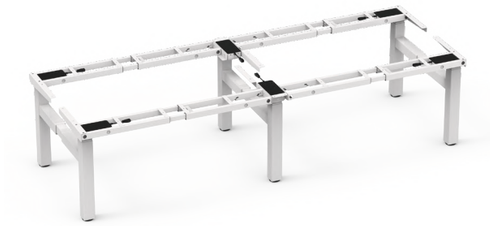

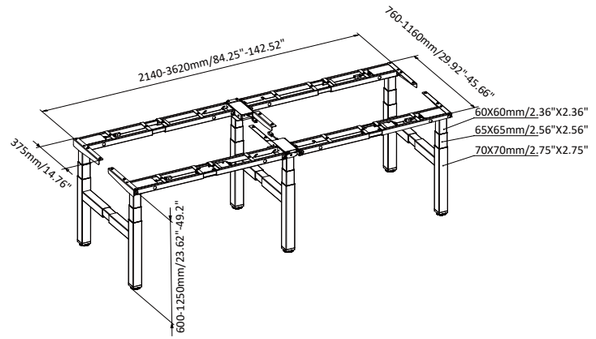


Workstation

Multi-station

Anti-collision ☑


Frame Color

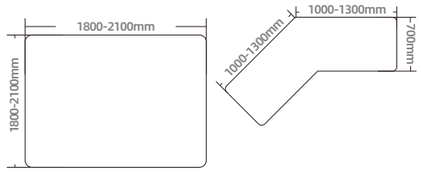

NT33-OB-8DF3

Height Range	Speed	Stroke
620-1270mm	40mm/s	650mm
Desk Top	**Load Capacity**	**Voltage**
1800-2100mm	120kg/position	100V-240V




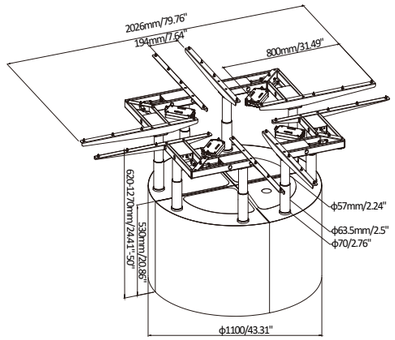

NT33-OB-9DF3

Height Range	Speed	Stroke
635-1285mm	40mm/s	650mm
Width Range	**Load Capacity**	**Voltage**
755-1145mm	150kg/position	100V-240V



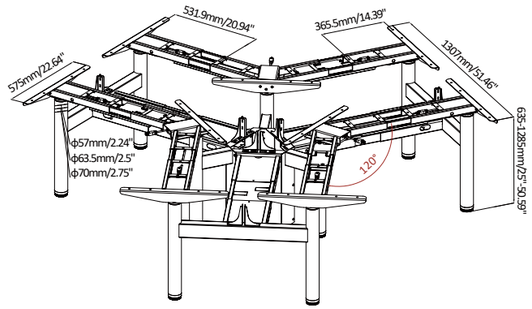


Workstation

Multi-station

Anti-collision ☑


Frame Color



NT33-OB-12BF3

Height Range	Speed	Stroke
635-1285mm	40mm/s	650mm
Width Range	**Load Capacity**	**Voltage**
1010-1750mm/ 1372-2122mm	150kg/position	100V-240V




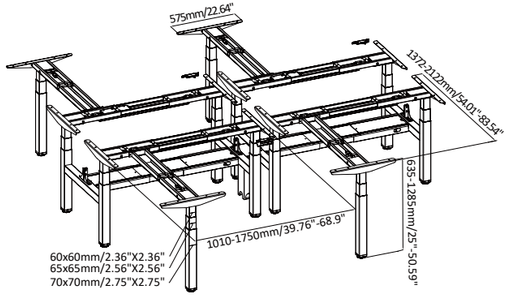

NT33-OB-12BF3

Height Range	Speed	Stroke
635-1285mm	40mm/s	650mm
Width Range	**Load Capacity**	**Voltage**
1010-1750mm/ 1372-2122mm	150kg/position	100V-240V



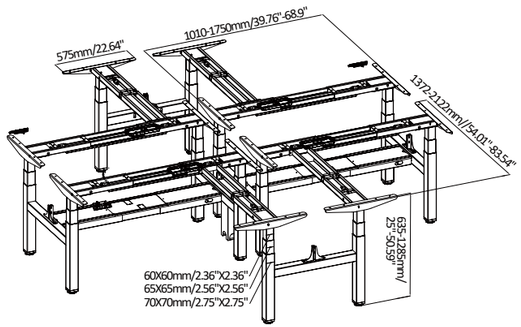

37''-65''

65''-100''

NATE

SONY

TV Stand

Single Motor

Anti-collision ☑

Frame Color

NT33-1TV(B)

Height Range
720-1580mm

Speed
30mm/s


Stroke
860mm

Suitable TV Size
37"-65"

Load Capacity
60kg

Voltage
100V-240V



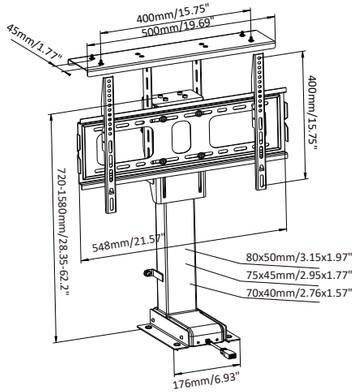

NT33-2SYDTV(A)

Height Range
870-1520mm

Speed
20mm/s


Stroke
650mm

Suitable TV Size
65"-100"

Load Capacity
70kg

Voltage
100V-240V



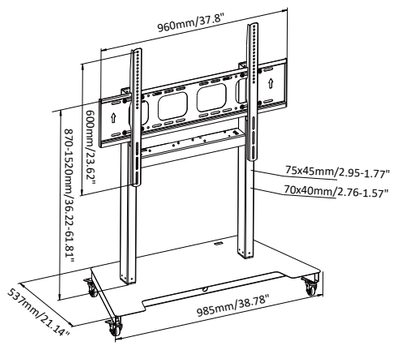

TV Stand

Dual Motors

Anti-collision ☑

Frame Color

NT33-2YDTV(D)

Height Range
920-1570mm

Speed
30mm/s


Stroke
650mm

Suitable TV Size
65"-100"

Load Capacity
100kg

Voltage
100V-240V



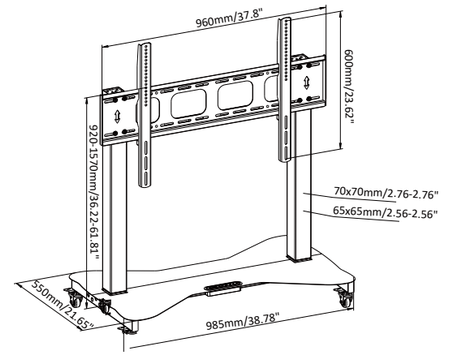

NT33-2YDTV(E)

Height Range
920-1570mm

Speed
30mm/s


Stroke
650mm

Suitable TV Size
Dual-Monitor/40"-165"

Load Capacity
100kg


Voltage
100V-240V



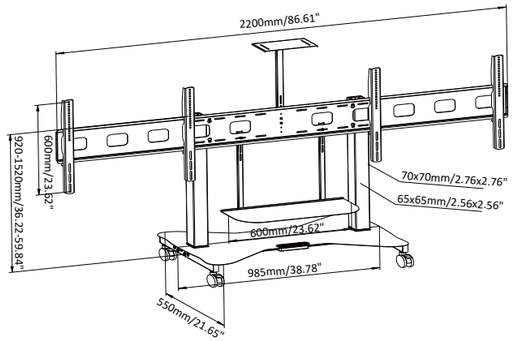

Dual Motors


2-legs / 2-stage



Shape	
Size(mm)	60x60
Standard Column	**NT33-2UF2**
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	**Economic control system**

Shape	
Size(mm)	60x60
Reversed Column	**NT33-2URF2**
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	**Economic control system**


NT33-2URF2



D5 motor housing


Height Range	Speed	Stroke
700-1200mm	30mm/s	500mm
Width Range	**Load Capacity**	**Voltage**
960-1500mm	100kg	100V-240V



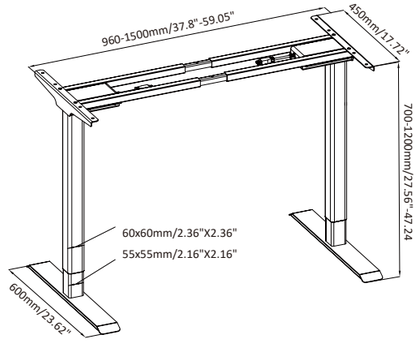

Dual Motors

2-legs / 2-stage



Shape	
Size(mm)	80x50
Standard Column	**NT33-2AF2**
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	**Economic control system**

Shape	
Size(mm)	80x50
Reversed Column	**NT33-2JRF2**
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	**Economic control system**


NT33-2JRF2



D5 motor housing


Height Range	Speed	Stroke
700-1200mm	30mm/s	500mm
Width Range	**Load Capacity**	**Voltage**
960-1500mm	100kg	100V-240V



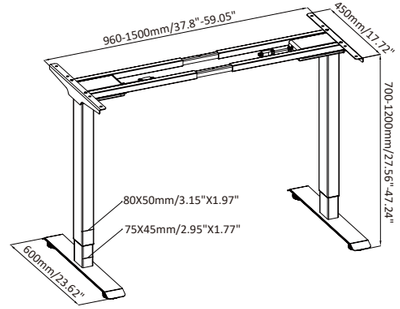

Dual Motors

2-legs / 3-stage



Shape	
Size(mm)	80x50
Standard Column	NT33-2AF3
Height Range(mm)	600-1250
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	120
Electric Control	Economic control system

Shape	
Size(mm)	80x50
Reversed Column	NT33-2JRF3
Height Range(mm)	600-1250
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	120
Electric Control	Economic control system

NT33-2JRF3



D5 motor housing

Height Range
600-1250mm

Width Range
960-1500mm


Speed
30mm/s

Load Capacity
120kg

Stroke
650mm


Voltage
100V-240V



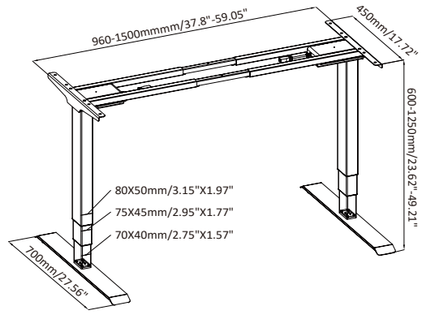

Dual Motors

2-legs / 3-stage



Shape	
Size(mm)	80x50
Standard Column	NT33-2AF3
Height Range(mm)	600-1250
Width Range(mm)	1010-1750
Speed(mm/s)	30
Load Capacity(kg)	120
Electric Control	Economic control system

Shape	
Size(mm)	80x50
Reversed Column	NT33-2JRF3
Height Range(mm)	600-1250
Width Range(mm)	1010-1750
Speed(mm/s)	30
Load Capacity(kg)	120
Electric Control	Economic control system

NT33-2AF3

Height Range
600-1250mm

Width Range
1010-1750mm


Speed
30mm/s

Load Capacity
120kg

Stroke
650mm

Voltage
100V-240V



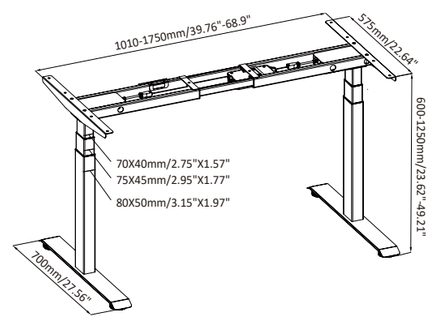


Three Motors

3-legs / 2-stage

Anti-collision ☑

Frame Color



Shape	
Size(mm)	80x50
Standard Column	NT33-3AF2
Height Range(mm)	700-1200
Width Range(mm)	1100-1800
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

Shape	
Size(mm)	80x50
Reversed Column	NT33-3JRF2
Height Range(mm)	700-1200
Width Range(mm)	1100-1800
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

NT33-3JRF2

Height Range
700-1200mm


Width Range
1160-1800mm

Speed
30mm/s

Load Capacity
120kg

Voltage
100V-240V



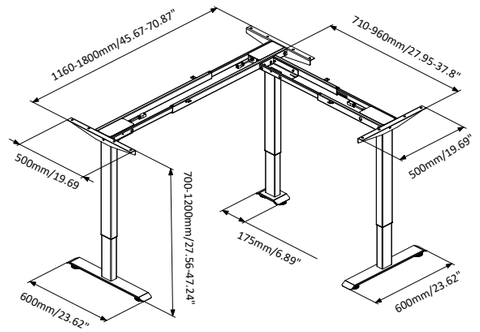


Four Motors

4-legs / 2-stage

Anti-collision ☑

Frame Color



Shape	
Size(mm)	80x50
Standard Column	NT33-4AF2
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

Shape	
Size(mm)	80x50
Reversed Column	NT33-4JRF2
Height Range(mm)	700-1200
Width Range(mm)	960-1500
Speed(mm/s)	30
Load Capacity(kg)	100
Electric Control	Economic control system

NT33-4AF2



D5 motor housing

Height Range
700-1200mm


Width Range
960-1500mm

Speed
30mm/s

Load Capacity
100kg/position

Voltage
100V-240V



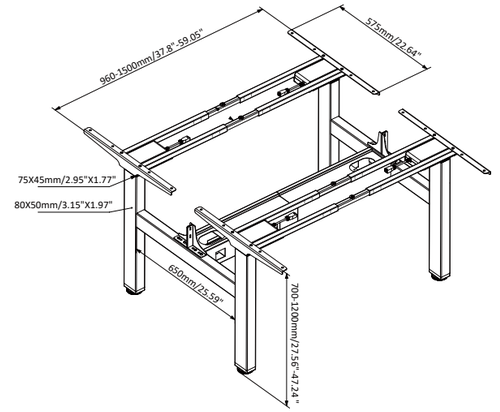

Single Motor

2-legs / 2-stage



NT33-2SDAF2

Round
Square

Height Range
700-1140mm

Speed
20mm/s


Stroke
440mm

Width Range
988-1400mm

Load Capacity
70kg

Voltage
100V-240V



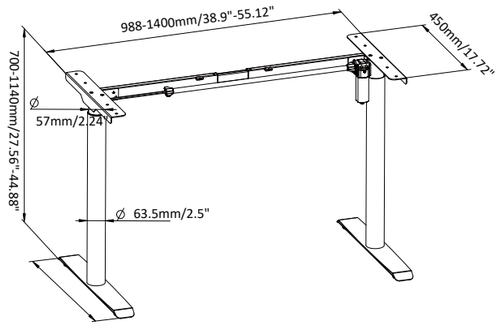

NT33-2SCAF2

Height Range
700-1140mm

Speed
20mm/s


Stroke
440mm

Width Range
990-1400mm

Load Capacity
70kg

Voltage
100V-240V



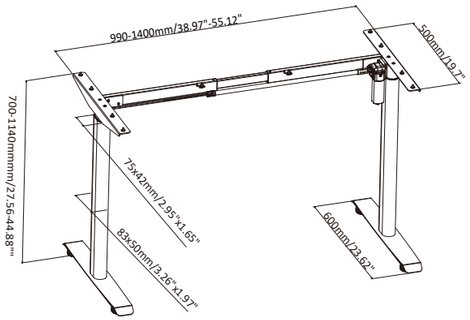




Single Motor

3-legs / 4-legs / 2-stage

Anti-collision ☑

Frame Color



NT33-3SABRH2



Double rod structure is more robust to use

Height Range
690-1150mm

Speed
20mm/s


Stroke
460mm

Width Range
1045-1400mm/
1125mm

Load Capacity
80kg

Voltage
100V-240V



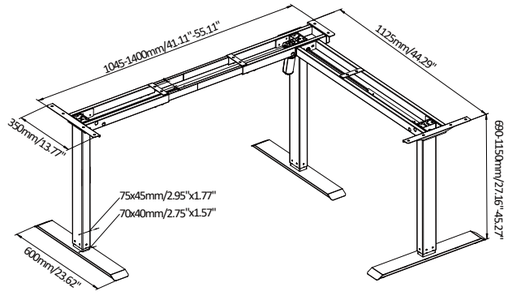

NT33-4SAB2D

Height Range
700-1140mm

Speed
20mm/s


Stroke
440mm

Width Range
1000-1400mm

Load Capacity
70kg/position


Voltage
100V-240V



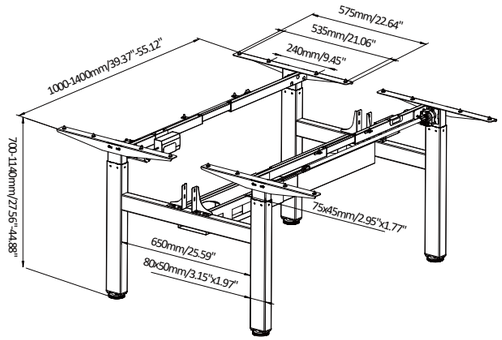

Manual Table

Hand Crank / 2-stage



NT33-2MR2

Height Range
700-1150mm


Speed
10mm/circle

Stroke
450mm

Width Range
910mm

Load Capacity
80kg



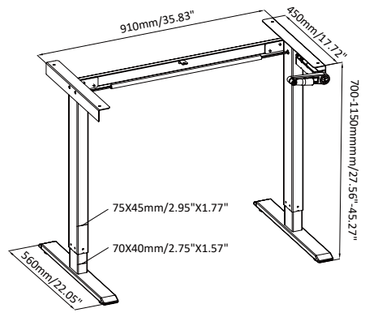

NT33-2MABH2

Height Range
710-1160mm


Speed
10mm/circle

Stroke
450mm

Width Range
980-1400mm


Load Capacity
80kg



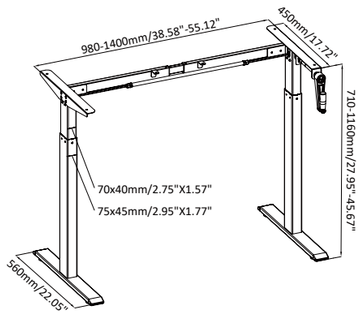

Manual Table

Hand Crank / 2-stage



NT33-3MH2(H)

Height Range
710-1160mm


Speed
10mm/circle

Stroke
450mm

Width Range
1320-2160mm/
1145-1985mm

Load Capacity
80kg



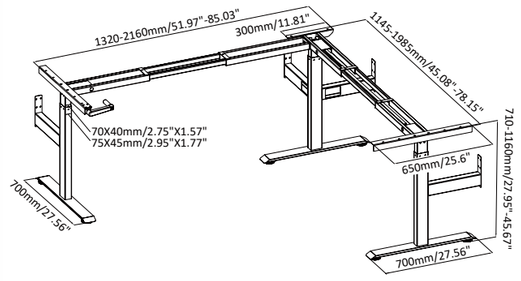

NT33-3MH2(I)

Height Range
710-1160mm


Speed
10mm/circle

Stroke
450mm

Width Range
1145-1985mm

Load Capacity
80kg



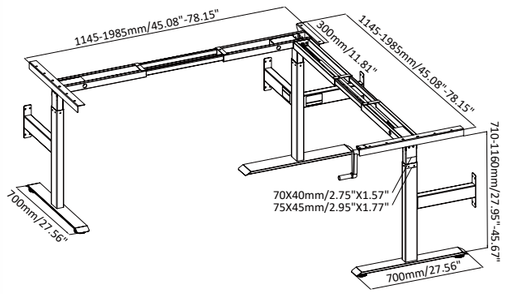


Double-decker Desk

2-legs / 2-stage

Anti-collision ☑

Frame Color



NT33-2SACRF2

Single Motor

Height Range
700-1140mm

Speed
20mm/s


Stroke
440mm

Top Size
600x1200mm

Load Capacity
70kg

Voltage
100V-240V



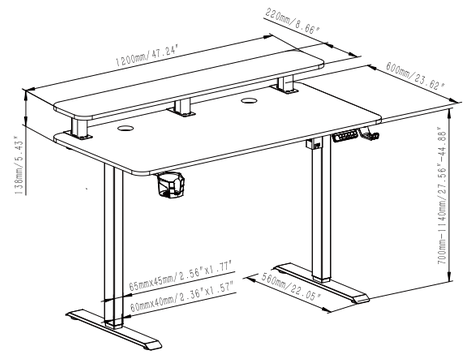

NT33-2JRF2(A)

Dual-motor

Height Range
700-1200mm

Speed
30mm/s

Stroke
500mm

Top Size
1400x700mm

Load Capacity
100kg

Voltage
100V-240V



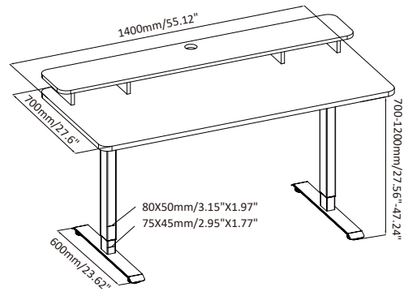


Table For kids

2-legs/ 2-stage



NT33-KD-2SAB2(C)

Height Range
725-1150mm

Speed
20mm/s


Stroke
425mm

Top Size
1040x720mm

Load Capacity
50kg

Voltage
100V-240V



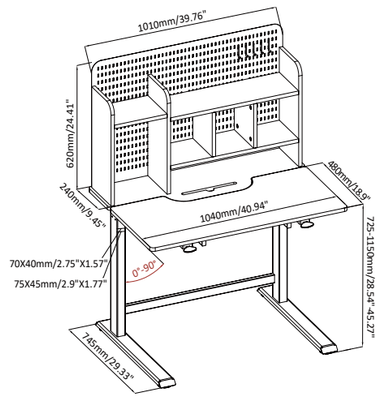

NT33-KD-2SCF2(B)

Height Range
600-950mm

Speed
20mm/s


Stroke
350mm

Top Size
1200x680mm

Load Capacity
70kg


Voltage
100V-240V



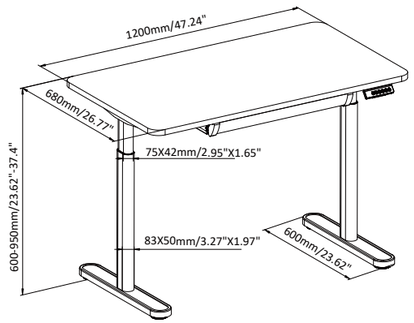

Gaming Desk

2-legs / 2-stage



NT33-GD-2SACRF2

APP controls color conversion

LED Atmosphere Light

Height Range
720-1160mm

Speed
22mm/s


Stroke
440mm

Top Size
1200x600mm

Load Capacity
80kg

Voltage
100V-240V



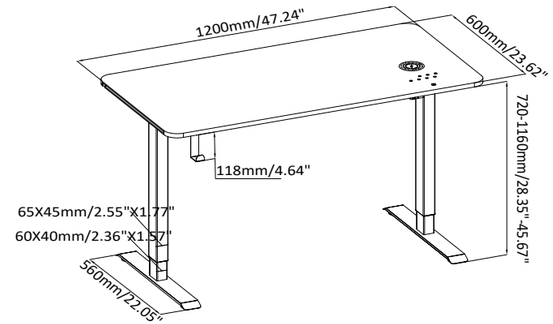

NT33-GD-2SBAF2

APP controls color conversion

LED Atmosphere Light

Height Range
710-1150mm

Speed
20mm/s


Stroke
440mm

Top Size
1400x700mm

Load Capacity
70kg

Voltage
100V-240V



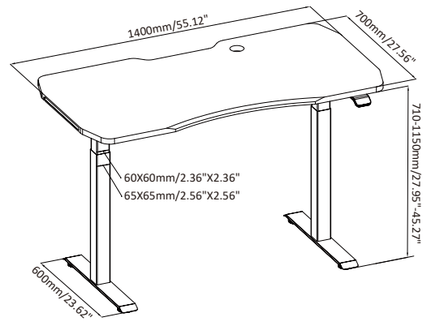

Glass Table

2-legs / 2-stage

Anti-collision ☑

Frame Color




NT33-E4-2JRF2(A)

Type-A*1 (18W)

Height Range	Speed	Stroke
700-1200mm	30mm/s	500mm
Top Size	**Load Capacity**	**Voltage**
1200x600mm	80kg	100V-240V



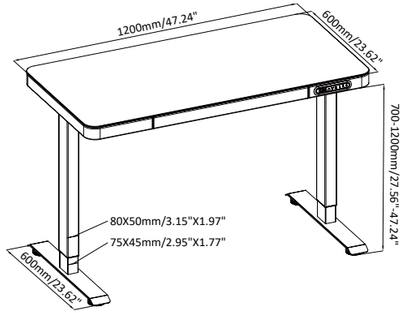


NT33-E4Pro-2JRF2(A)

Wireless Charging*1 (10W)
Type-C*1 (18W)
Type-A*2 (18W)

Height Range	Speed	Stroke
700-1200mm	30mm/s	500mm
Top Size	**Load Capacity**	**Voltage**
1200x600mm	80kg	100V-240V



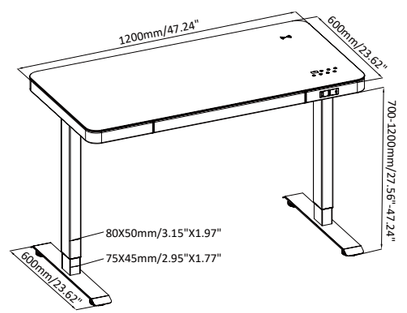


Wooden Table

2-legs / 2-stage

Anti-collision ☑

Frame Color




NT33-E4Pro-2SABRF2(B)

Type-C*1 (18W)
Type-A*2 (18W)

Height Range	Speed	Stroke
715-1155mm	20mm/s	440mm
Top Size	**Load Capacity**	**Voltage**
1200x600mm	70kg	100V-240V



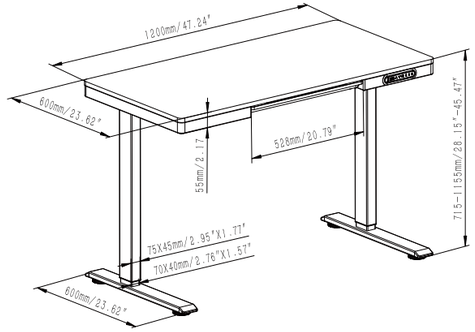


NT33-E4(A)Pro-2JRF2

Wireless Charging*1 (10W)
Type-C*1 (18W)
Type-A*2 (18W)

Height Range	Speed	Stroke
725-1225mm	30mm/s	500mm
Top Size	**Load Capacity**	**Voltage**
1200x600mm	100kg	100V-240V



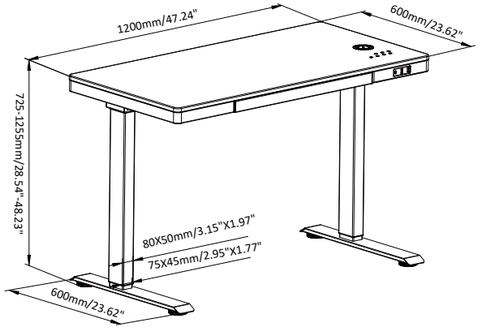


Dining Table

4-legs /2-stage

Anti-collision ☑

Frame Color





NT33-CZ-4SBERF2-C

Two motors

Height Range
700-1180mm

Speed
20mm/s


Stroke
480mm

Width Range
1500mm

Load Capacity
100kg

Voltage
100V-240V



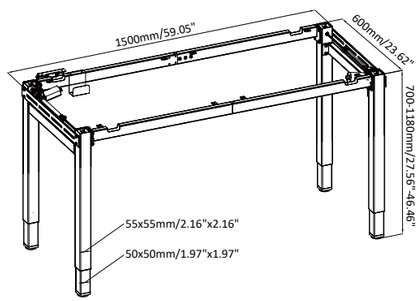

NT33-CZ-4SBARF2

Two motors

Height Range
710-1150mm

Speed
20mm/s


Stroke
440mm

Width Range
1100-1700mm

Load Capacity
100kg

Voltage
100V-240V



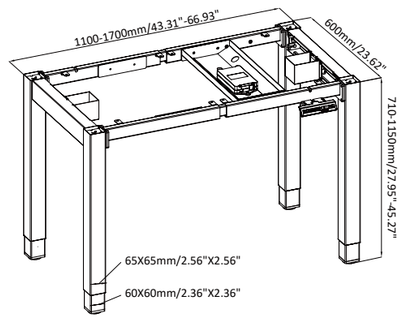

NT33-CZ-4DBRF2-A

Four motors

Height Range
700-1150mm

Speed
30mm/s


Stroke
450mm

Width Range
1800mm

Load Capacity
100kg

Voltage
100V-240V



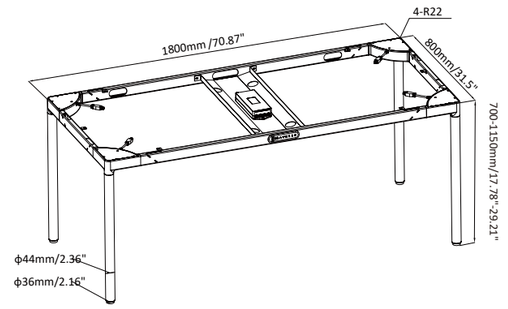


COMPLETE DESK SERIES

Flip Table

Dual Motors / 3-stage

Anti-collision ☑

Frame Color



NT33-T4-2AF3

Height Range
600-1250mm

Speed
40mm/s


Stroke
650mm

Top Size
1200x770mm

Load Capacity
120kg

Voltage
100V-240V



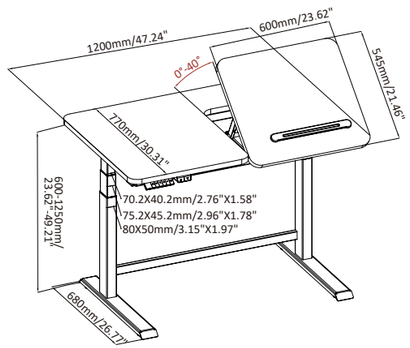

NT33-T6-2AF3

Height Range
600-1250mm

Speed
40mm/s


Stroke
650mm

Top Size
1200x600mm

Load Capacity
120kg

Voltage
100V-240V



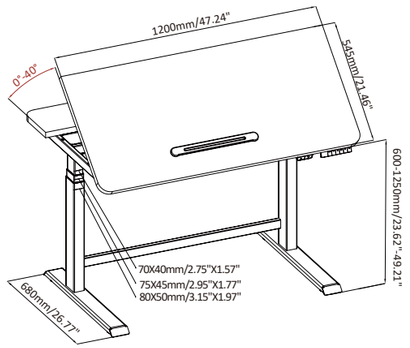


Flip Table

Single Motor / Dual Motors

Anti-collision ☑

Frame Color



NT33-ST1-2SACRHF2(A)

Height Range
690-1150mm

Speed
20mm/s


Stroke
460mm

Top Size
1400x700mm

Load Capacity
70kg

Voltage
100V-240V



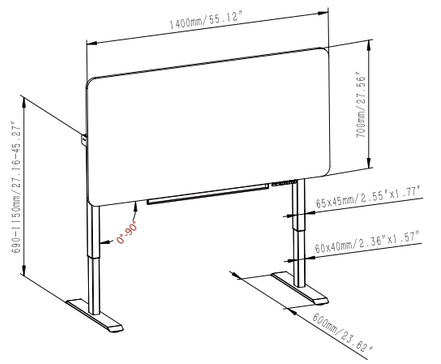

NT33-T9-2AF3

Height Range
600-1250mm

Speed
40mm/s


Stroke
650mm

Top Size
1400x700mm

Load Capacity
120kg

Voltage
100V-240V



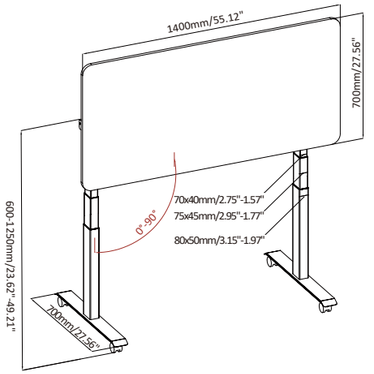


LIFT COLUMNS

Core Drive Unit
Diverse Performance
Adapt to multiple scenarios
Excellence Design





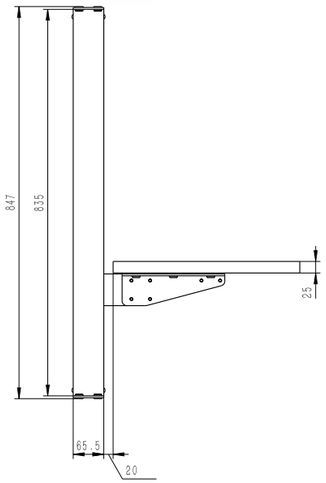

WM-2I1


Standard

Load Capacity
800N

Stroke
500mm

Height
290-790mm

Speed
25mm/s



Special Columns




AD-VA2

Load Capacity
2000N

Stroke
480mm

Height
640-1120mm

Speed
15mm/s



Standard




AD-VA3

Load Capacity
2000N

Stroke
360mm

Height
400-760mm

Speed
10mm/s



Standard




RK-BHF3

Load Capacity
600N

Stroke
630mm

Height
620-1250mm

Speed
30mm/s



Standard




TDIF3

Load Capacity
800N

Stroke
650mm

Height
600-1250mm

Speed
40mm/s



Standard



WM-1N1

Load Capacity
500N

Stroke
500mm

Height
263-763mm

Speed
25mm/s





WM-2SA1

Load Capacity
600N

Stroke
500mm

Height
263-763mm

Speed
20mm/s






HF3A PRO

Load Capacity
800N

Stroke
650mm

Height
600-1250mm

Speed
80mm/s



Standard




BF4

Load Capacity
800N

Stroke
680mm

Height
490-1170mm

Speed
50mm/s



Standard

2-stage Columns




AF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
30mm/s



Standard



BF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
30mm/s



Standard




CF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
30mm/s



Standard



DF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
30mm/s



Standard




ARF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
30mm/s



Reverse



BRF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
30mm/s



Reverse




CRF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
30mm/s



Reverse



DRF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
30mm/s



Reverse




UF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
25mm/s



Standard




HF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
50mm/s



Standard




NF2

Load Capacity
1500N

Stroke
455mm

Height
695-1150mm

Speed
8mm/s



Standard




URF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
25mm/s



Reverse




HRF2

Load Capacity
800N

Stroke
500mm

Height
665-1165mm

Speed
30mm/s



Reverse

3-stage Columns




AF3

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Standard



BF3

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Standard




CF3

Load Capacity
800N

Stroke
650mm

Height
600-1250mm

Speed
40mm/s



Standard




DF3

Load Capacity
800N

Stroke
650mm

Height
600-1250mm

Speed
40mm/s



Standard




ARF3

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Reverse



BRF3

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Reverse




CRF3

Load Capacity
800N

Stroke
650mm

Height
600-1250mm

Speed
40mm/s



Reverse




DRF3

Load Capacity
800N

Stroke
650mm

Height
600-1250mm

Speed
40mm/s



Reverse




FF3

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Standard




HF3A

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Standard




BHF3

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Standard




IF3

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Standard




FRF3

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Reverse




HRF3A

Load Capacity
800N

Stroke
650mm

Height
565-1215mm

Speed
40mm/s



Reverse

CONTROL BOX

Security protection mechanism
Powerful compatibility and extensibility

ADVANCED CONTROL SYSTEM



NT33-BK

- **2** legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz,5A
- Output: 32Vdc,each 110VA, total 220VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



NT33-BC

- **3** legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz,10.5A
- Output: 30Vdc,each 3.5A, total 10.5A
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



NT33-BO

- **4** legs supported
- Energy saving during non-use
- Input: 220-240VAC 50-60Hz,5A
- Output: 30Vdc,each 3A, total 12A
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified

ECONOMIC CONTROL SYSTEM



NT33-BB

- **1** legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz,2.5A
- Output: 24Vdc,each 100VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



NT33-BD

- **2** legs supported
- Energy saving during non-use
- Input: 28-32V
- Output: 18-26V
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



NT33-BT

- **2** legs supported
- Energy saving during non-use
- Input: 100-240V 50-60Hz,5A
- Output: 32Vdc,each 110VA,total 220VA
- Duty cycle: 2min ON/18min OFF
- Anti-collision protection sensitivity function
- Worldwide industry certified



ADVANCED CONTROL SYSTEM



NT33-H1T ○●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Anti-Collision Function
- Logo On Start Up



NT33-H1R ○●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Anti-Collision Function
- Logo On Start Up



NT33-H1O ●

- OLED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge Optional
- LED colored lights
- Logo On Start Up



NT33-H1S ○●

- Digital LED Screen
- 2 Memory Preset
- Anti-Collision Function
- Recessed Into Table Top



NT33-H1H ●

- OLED Screen
- 3 Memory Preset
- Type C-quick Charge
- Anti-Collision Function
- Logo On Start Up



NT33-HV ●

- OLED Screen
- UP DOWN Paddle
- 2 Memory Preset
- Type C-quick Charge Optional
- LED Light (Green/Orange/white)
- Time Reminder
- Multiple Languages Available ENG,DE,FR,ES,IT.
- Logo On Start Up



NT33-H1W ○●

- Digital LED Screen
- 3 Memory Preset
- Type C-quick Charge Optional
- Recessed Into Table Top
- USB Port optional



NT33-HW1 ○●●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Time Reminder
- Multiple Languages Available ENG,DE,FR,ES,IT.
- Logo On Start Up



NT33-H1I1 ●

- OLED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge
- Logo On Start Up



NT33-H1D ●

- OLED Screen
- 2 Memory Preset
- Type C-quick Charge
- LED Light Background
- Logo On Start Up



NT33-H1K ●

- OLED Screen
- 4 Memory Preset
- Type C-quick Charge
- Logo On Start Up



NT33-H1G ○●●

- Digital LED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge optional

ADVANCED CONTROL SYSTEM



NT33-H1B

- Digital LED Screen
- Two Button-UP Down



NT33-H1F

- Digital LED Screen
- 4 Memory Preset
- Type C-quick Charge Optional



NT33-HU

- Digital LED Screen
- 3 Memory Preset
- Type C-quick Charge Optional

ECONOMIC CONTROL SYSTEM



NT33-BHK

- Handset Integrated
- Digital LED Screen
- 4 Memory Preset
- Type C-quick Charge Optional



NT33-BHG

- Handset Integrated
- Digital LED Screen
- 4 Memory Preset
- Time Reminder
- Type C-quick Charge optional



NT33-BHH

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset



NT33-BHP

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset
- USB Port optional



NT33-BHV

- Handset Integrated
- Digital LED Screen
- 3 Memory Preset
- Type C-quick Charge Optional
- Recessed Into Table Top
- USB Port optional

SWITCH MODE POWER SUPPLY



SMPS-W-1.8A

- Input: 100-240V, 50/60Hz, 2.0A
- Output: 29.0V-1.8A 52.2W
- Global Power Standard Optional



SMPS-W-1.0A

- Input: 100-240V, 50/60Hz, 1.5A
- Output: 29.0V-1.0A 29.0W
- Global Power Standard Optional



European Plug



England Plug



USA Plug



Australia Plug



Chinese Plug



SMPS-P-1.8A

- Input: 100-240V, 50/60Hz, 1.6A
- Output: 29.0V-1.8A 52.2W



SMPS-P-2.0A

- Input: 100-240V, 50/60Hz, 1.5A
- Output: 29.0V-2.0A 58W



SMPS-P-3.0A

- Input: 100-240V, 50/60Hz, 2.0A
- Output: 29.0V-3.0A 87W

Rechargeable Battery



NT33-Battery-001

- Rechargeable Li-ion Battery Pack
- Capacity: :25.9V/1800mAh/56.98Wh
- Max Discharged Current:5A
- For mobile applications
- Low battery alarm



NT33-Battery-002


- Rechargeable Li-ion Battery Pack
- Capacity: :25.9V/2200mAh/56.98Wh
- Max Discharged Current:5A
- For mobile applications
- Low battery alarm

FEET

Strong Foundation Support
Multiple Size Ratio



Bevel type



	FA03B	FA22	FB18	FC04	FR46
DIMENSION	700x75x20mm	600x75x18mm	700x80x18mm	600x80x20mm	560x65x17mm
PLATE THICKNESS	2.5mm/2.5mm	2.5mm/2.0mm	2.5mm/3.0mm	2.5mm/2.5mm	2.0mm/2.0mm
FIT TUBE	Rectangle(80*50)	Rectangle(80*50)	Square	Oval,Round	Rectangle(80*50)
FEATURE	Bevel	Bevel	Bevel	Bevel	Bevel

Thicken type



	FA85
DIMENSION	700x75x22mm
PLATE THICKNESS	2.5mm/2.0mm
FIT TUBE	Rectangle(85*55,90*60)
FEATURE	Thick/ Bevel

Round type



	FC06	FD04
DIMENSION	700x85x20mm	680x85x22mm
PLATE THICKNESS	3.0mm/3.0mm	4.0mm/4.0mm
FIT TUBE	Oval	Round
FEATURE	Round head	Round head

Economic type



	FR30	FA55	FA67
DIMENSION	560x60x20mm	560x60x20mm	600x70x20mm
PLATE THICKNESS	2.0mm	2.0mm	2.0mm
FIT TUBE	Rectangle(80*50)	Rectangle(80*50)	Rectangle(80*50)
FEATURE	Low Cost	Low Cost	Low Cost

FIT TUBE	LJK-A	LJK-H/F	LJK-B	LJK-D
				
	Rectangle (80*50)	Rectangle (85*55,90*60)	Square (70*70)	Round (70*70)

	JLD	JLE	HLA	HLD
DIMENSION	φ50	φ65	φ40	φ50
SCREW THREAD	M8*14	M8*14	M8*15	M8*15
				

ACCESSORIES

Line Management Scheme



ACCESSORIES

LIFTING TABLE ACCESSORIES

Cable Tray



XC51

Dimension : 850 x 140 x 26 mm
Material : Steel
Colour ● ● ○



XC38

Dimension : 920x172.5x20mm
Material : Steel
Colour ● ● ○



XC131

Dimension : 480x68x30mm
Material : Steel
Colour ● ● ○



XC94

Dimension : 1150x139.6x98mm
Material : Steel
Colour ● ● ○



XC112

Dimension : 400x111x100.5 mm
Material : Steel
Colour ● ● ○



XC113

Dimension : 1200x153x85mm
Material : Steel
Colour ● ● ○

Tank Chain



FOOT TANK CHAIN

Dimension :145x145x1320mm
Material :Plastic+Steel
Colour ● ● ○ ●



BOX TANK CHAIN

Dimension : 86x60x1320mm
Material : Plastic+Steel
Colour ● ● ○ ●



MAGNETIC TANK CHAIN

Dimension : 34.5x34.5x1320mm
Material : Plastic+Steel
Colour ● ● ○ ●



MAGNETIC BOX TANK CHAIN

Dimension : 350x59.6x1320mm
Material : Plastic+Steel
Colour ● ● ○ ●

Drawer combination



DRAWER COMBINATION A

Packing size : 545x295x45mm
Material : Plastic
Colour ● ● ○



DRAWER COMBINATION E

Packing size : 470x360x120mm
Material : Steel
Colour ● ● ○

CPU holder



HOST BRACKET A1

Packing size : 430x250x200mm
Material : Steel
Colour ● ● ○



HOST BRACKET B

Packing size : 455X220X135mm
Material : Plastic
Colour ● ● ○

Screen



SIDE INSERT SCREEN

Dimension : 790x395x(12+12)mm
Material : 100%PET
Colour 40+





CURVED FOLDABLE SCREEN

Dimension : （350+1200+350）x600Hx12mm
（350+1400+350）x600Hx12mm
Material : 100%PET
Colour 40+

TWO-SEATER SCREEN

Packing size : 1200x700x(12+12)mm
1400x700x(12+12)mm
1600x700x(12+12)mm
Material : 100%PET+Fabric
Colour:Series 006: 25 Color Options + Series 9009

TABLE TOP

Density Board


WHITE SCRUB


WHITE OAK


VINTAGE


LIGHT WOOD GRAIN


WHITE MOONLIGHT MATT


CAIRO WALNUT


SCHATT WALNUT


DEEP WALNUT


BLACK SCRUB


BLACK CARBON FIBER


BLACK WOOD GRAIN

Shaving Board

WHITE


KNOT OAK


MAPLE


AMBER YELLOW


WHITE OAK


BLACK CARBON FIBER


WALNUT CANYON


GRAY LINEN


APPLE YELLOW


RUST YELLOW


ZEBRAWOOD


BLACK SCRUB

Size Selection

